



Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130
(830)629-2900 /1-800-729-3839 /FAX(830)620-6711
E-MAIL: detex@detex.com INTERNET: www.detex.com

INSTALLATION INSTRUCTIONS FOR MORTISE 01 & 02CM OUTSIDE TRIMS

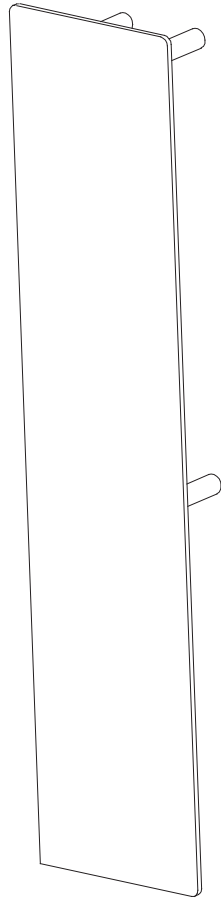







01CM

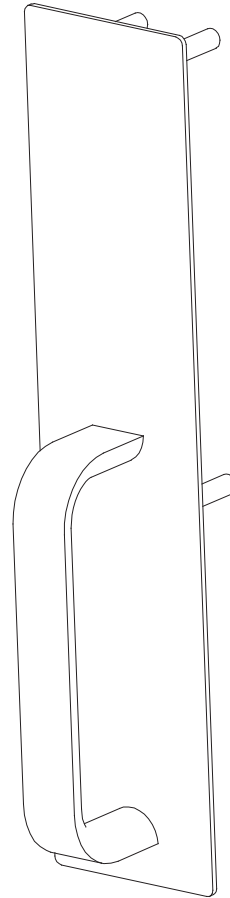

02CM

01 & 02CM TRIM INSTRUCTIONS


NOTE: 1) Mortise lock NOT supplied with TRIM device.
 2) For a retrofit application, remove existing lock and device before installing new trim.
 3) LHR installation shown (Reverse all steps for RHR).

Machine Screws			Sheet Metal / Wood Screw		
A	I	L	M	N	J
#1/4-20 x 1"	#12-24 x 1/2"	#1/4-20 x 1/2"	#1/4-20 x 2-3/4"	#1/4-20 x 2-1/4"	#12 x 1"
					

STEPS 1: PREP DOOR


1 TRIM side: Use plastic template to mark and drill TRIM holes

MARK HOLES

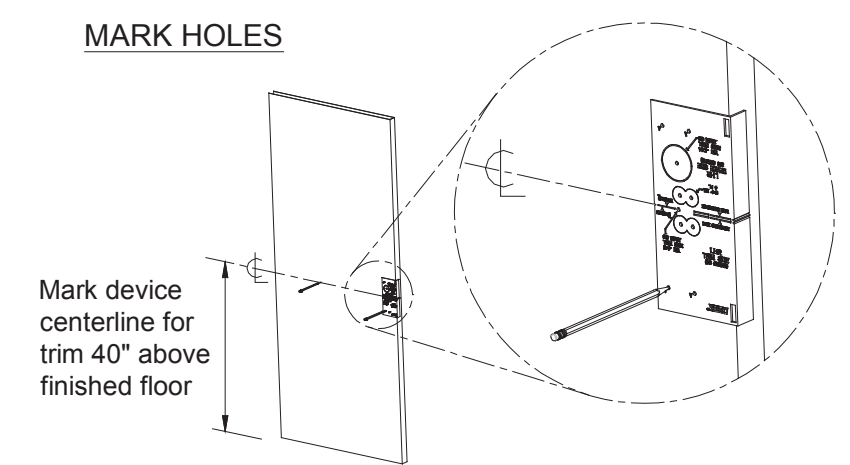

Mark device centerline for trim 40" above finished floor

DRILL HOLES

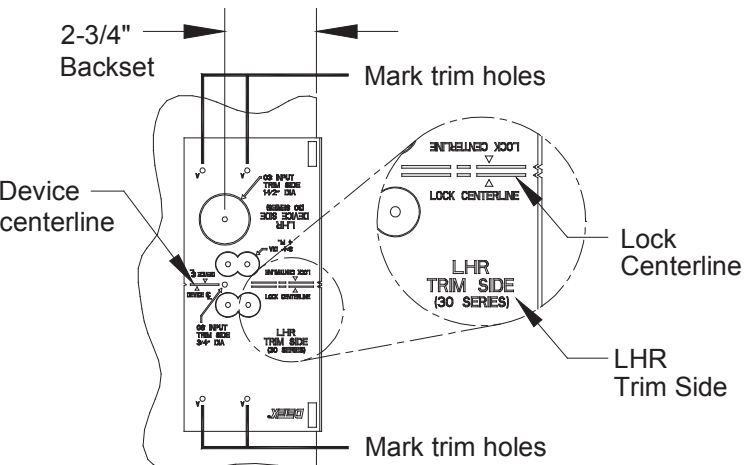


2-3/4" Backset

Drill 3/8" diameter holes thru trim side only 4 places

Lock washer


#1/4 Lock washer



STEPS 2-4: INSTALL MORTISE LOCK AND TRIM DEVICE

2 Install MORTISE lock

Install lock with (2) "I" screws or (2) "J" screws for wood doors.

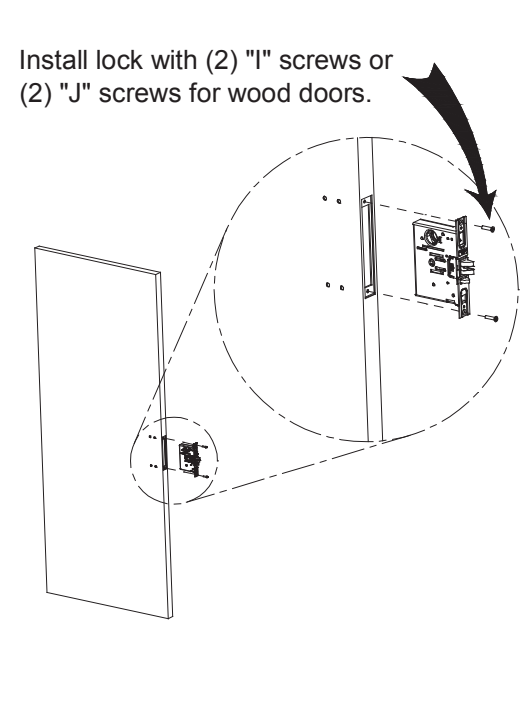


3 Mark and drill bottom hole for thru bolt

Drill 1/2" diameter hole thru door

For 01 CH-M only

Drill 3/8" diameter (1/2" max) hole thru door

For 02 CH-M only

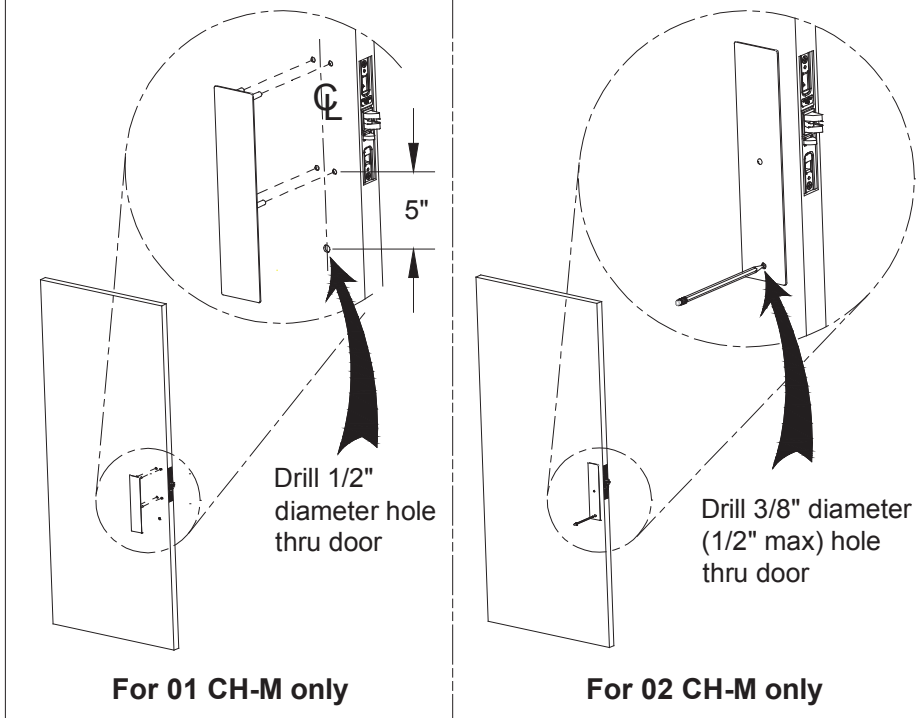

4 Install TRIM device

Assemble pull to trim plate with "L" screw provided

Install backplate with (4) "A" screws.

Fasten bottom of pull with "M" or "N" screw and washer provided

IMPORTANT!
For modular cable devices, see electrical instructions for cable routing.

