

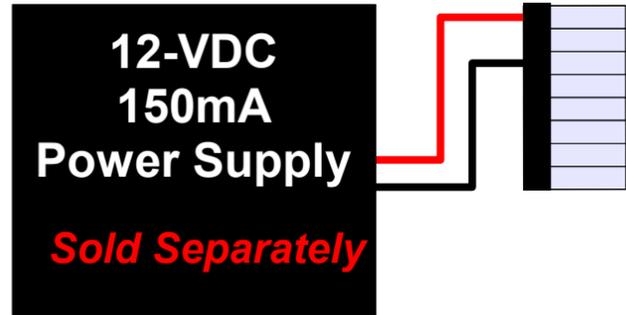


# ES612

## ZONE ANNUNCIATOR WITH N/O RELAYS

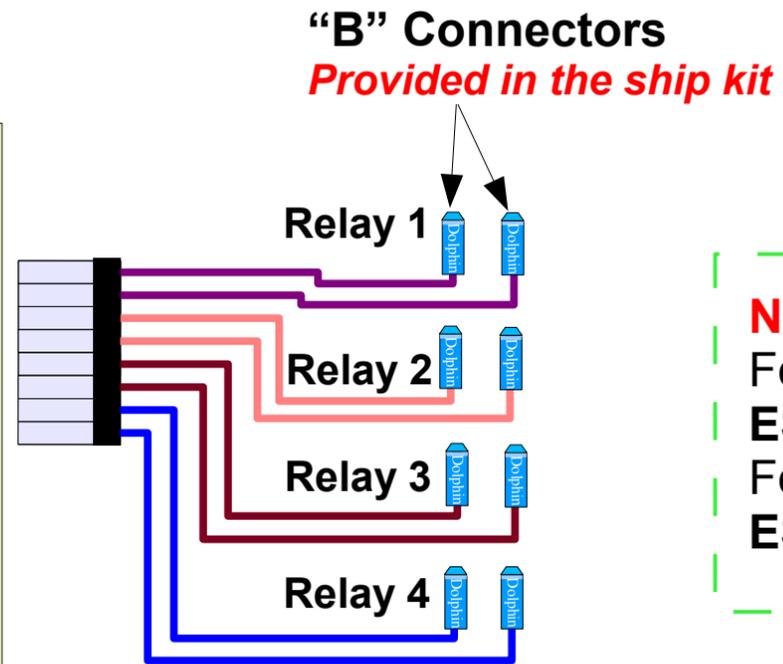

**Global Alarm Relay**  
*N/O dry contact.  
500mA @30VDC*

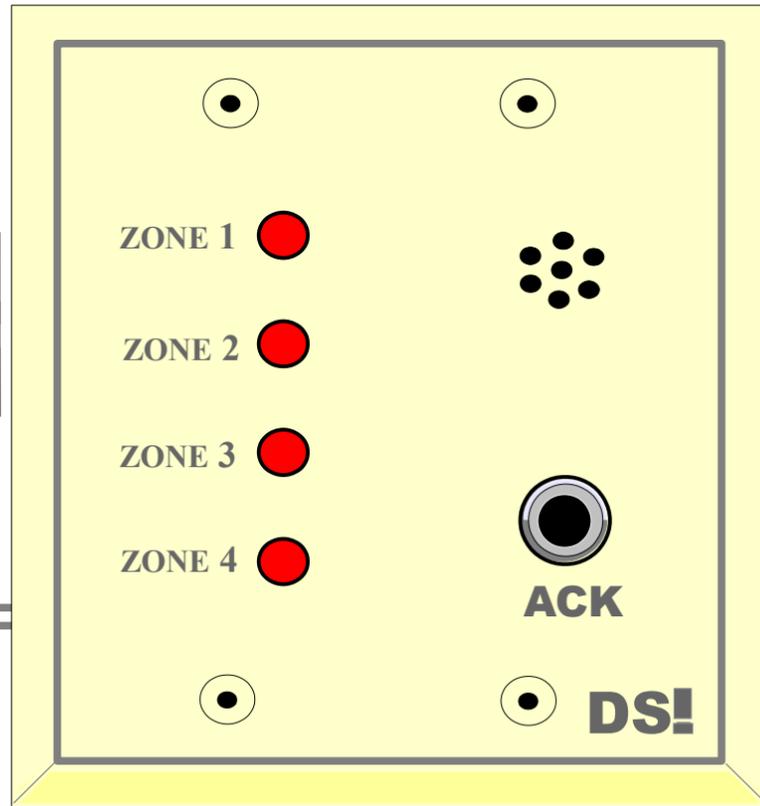

**Zone Relays**  
*N/O dry contact.  
500mA @30VDC*

**Note:**  
For eight zones use an  
**ES622**  
For twelve zones use an  
**ES632**

**Note:**  
**Wire Gauge: Signal**  
*22 AWG = Signal wires up to 85 feet  
18 AWG = Signal wires up to 180 feet  
16 AWG = Signal wires up to 300 feet*  
**Wire Gauge: Power**  
*22 AWG = Power wires up to 85 feet  
18 AWG = Power wires up to 180 feet*

**ES612 (Front View)**  
*Alarms when door  
switch opens. Zone  
relay will close when  
in alarm. Zone relay  
follows the alarm.*

**Specifications:**  
Power: *12VDC at (150ma)*  
Input: *N/C door contact*  
Output: *N/O global alarm relay 500ma at 30 VDC*  
Horn Volume: *70 db*  
Back box: *2 Gang 2.5” deep*

