


## INSTALLATION INSTRUCTIONS FOR ADVANTEX NARROW (01DN) TRIM OR WIDE (01D) TRIM

### Drawing # 105151 & 105150

#### PREPARING THE DOOR

1. Mark and centerpunch the exit device mounting plate holes according to the exit device instructions.
2. Drill pilot holes at centerpunched locations. CAUTION: Be sure to drill STRAIGHT through the door.
3. For METAL doors: DEVICE SIDE: drill a 5/16" hole  
TRIM SIDE: drill 1/2" hole  
For WOOD doors: drill 1/2" hole through door

#### ASSEMBLE THE OUTSIDE TRIM AND BACKPLATE AS SHOWN BELOW.

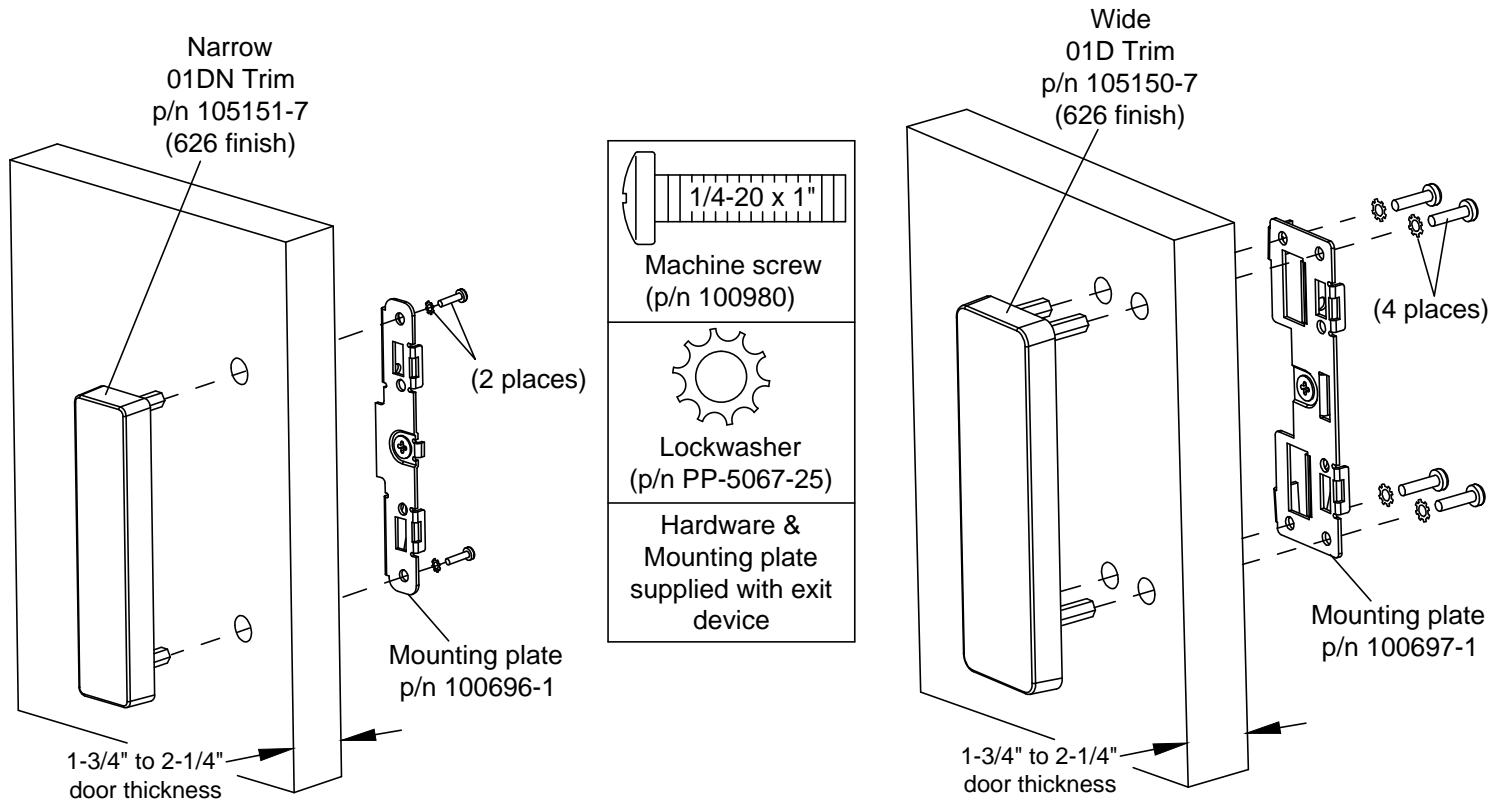

Resume the exit device instructions.

Should you have a Question/Problem with your Detex device please call Detex Technical Support from job site at 1-800-729-3839 and choose option 2 on our menu. Please do not return the product to the distributor.

For **WARRANTY** information,  
scan code below or  
go to [www.detex.com/warranty](http://www.detex.com/warranty)

For device installation videos,  
scan code below or  
go to [www.detex.com/videos](http://www.detex.com/videos)



Owner's Copy

