


Accepts jacketed cable up to 1/4" diameter.  
 For wood and metal doors and frames.  
 Intended for door openings less than 120 degrees.  
 Not intended for center hung door applications.

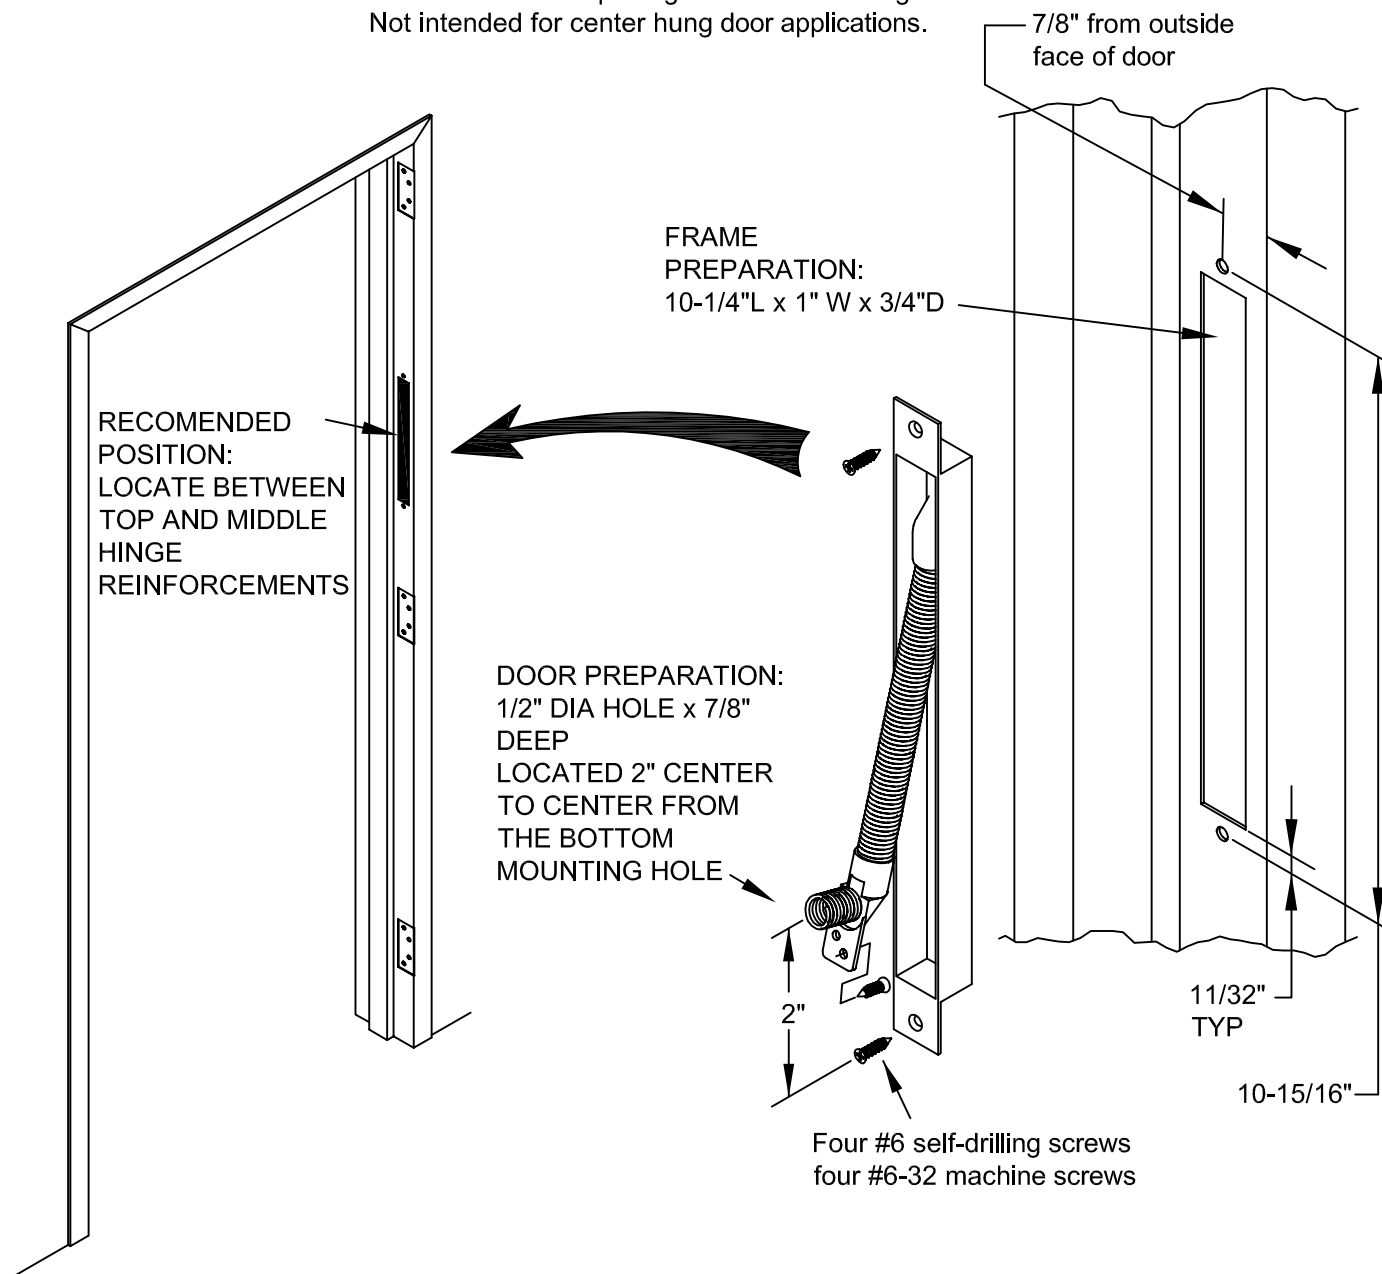

HDG. \_\_\_\_\_ DR. \_\_\_\_\_

**RESPONSIBILITY**  
 Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames regardless of the type, material or method of construction.

TEMPLATE  
 DETEX PT-5  
 POWER TRANSFER

**DETEX**<sup>®</sup>

DO NOT SCALE DRAWING

DATE 10-5-11 TEMPLATE NUMBER T1204