


Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130
(830)629-2900 /1-800-729-3839 /FAX(830)620-6711
E-MAIL: detex@detex.com INTERNET: www.detex.com

INSTALLATION INSTRUCTIONS FOR MORTISE 01WM OUTSIDE TRIM

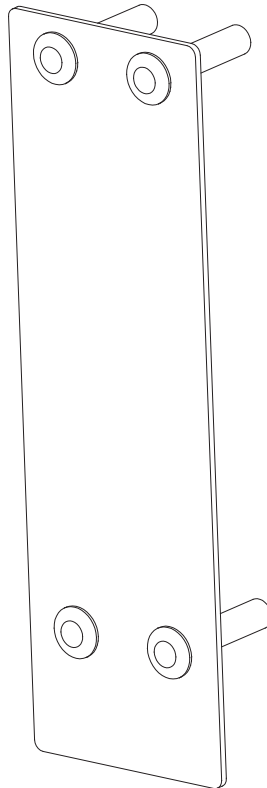

01WM TRIM INSTALLATION INSTRUCTIONS

NOTES:

- 1) Mortise lock NOT supplied with TRIM device.
- 2) For a retrofit application, remove lock and device before installing new trim.
- 3) LHR installation shown (Reverse all steps for RHR).

STEPS 1: PREP DOOR

1 TRIM side: Use plastic template to mark and drill TRIM holes

MARK HOLES

Mark centerline for trim 40" above finished floor

Drill 3/8" diameter holes thru trim side only, 4 places

STEP 2: INSTALL TRIM DEVICE

2 Install TRIM device

#1/4 Lockwasher

#1/4-20 Sex nuts

Install backplate with (4) "A" screws

TRIM INSTALLATION COMPLETE

1. Continue installation using device instructions (p/n:101349).
2. For modular cable devices, see electrical instructions for cable routing.

Machine Screws	
A	I
#1/4-20 x 1"	#12-24 x 1/2"

Sheet Metal / Wood Screw
J
#12 x 1"

Lock washer	Sex Nut
#1/4 Lock washer	#1/4-20 Sex Nut