



Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130-3045  
(830)629-2900 / 1-800-729-3839 / Fax (830)620-6711  
E-MAIL: detex@detex.com INTERNET: www.detex.com

## INSTALLATION INSTRUCTIONS FOR ADVANTEX NARROW (01DN) TRIM OR WIDE (01D) TRIM

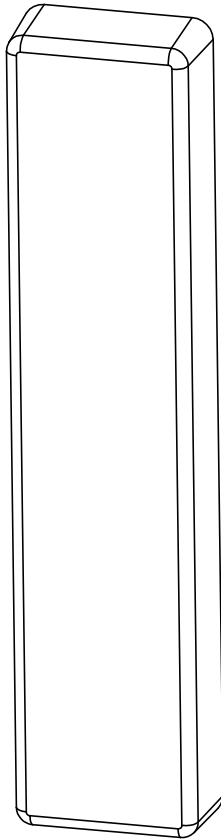

NARROW (01DN)TRIM  
p/n 105151

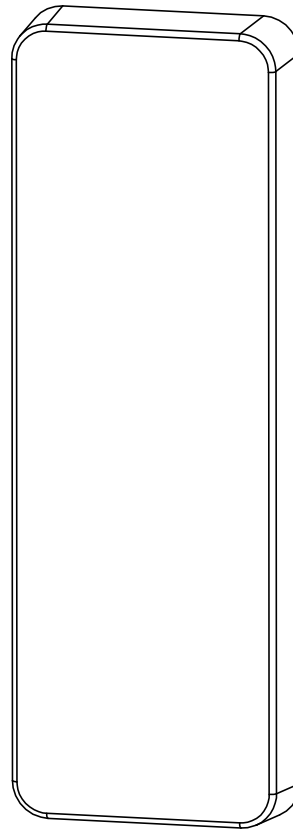

WIDE (01D)TRIM  
p/n 105150

### TOOLS AND SUPPLIES

(Always put on safety glasses prior to beginning installation of unit)

- Pencil
- Center punch
- Hammer
- Drill motor
- Drill bits
- Phillips head screwdriver
- Tape measure

OWNER'S COPY

### PREPARING THE DOOR

1. Center punch holes "a" marked earlier.
2. Drill two (2) pilot holes "a" for 01DN trim or four (4) for 01D trim.  
CAUTION: Be sure to drill STRAIGHT through the door.
3. Drill holes "a" according to the chart (Fig 1).




Fig. 1

### ASSEMBLING THE OUTSIDE TRIM AND BACKPLATE:

1. Align the hex stand-offs and trim assembly through the drilled holes (Fig 2).
2. Fasten the backplate to the inside face of the door with lockwashers and 1/4-20 machine screws.
3. Resume the panic hardware instruction.

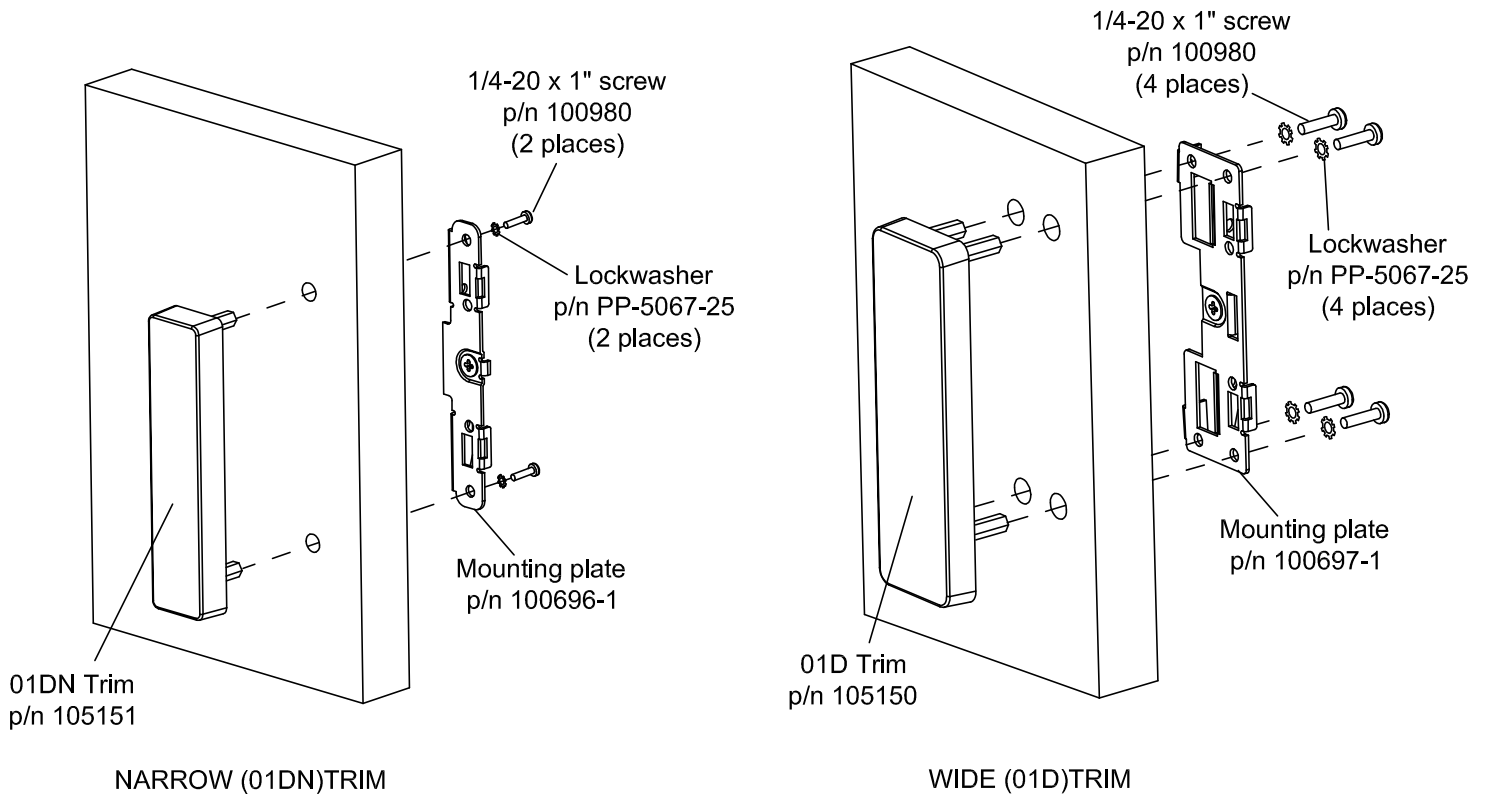


Fig. 2