
## **ValueSeries**® V40 SERIES (RIM)

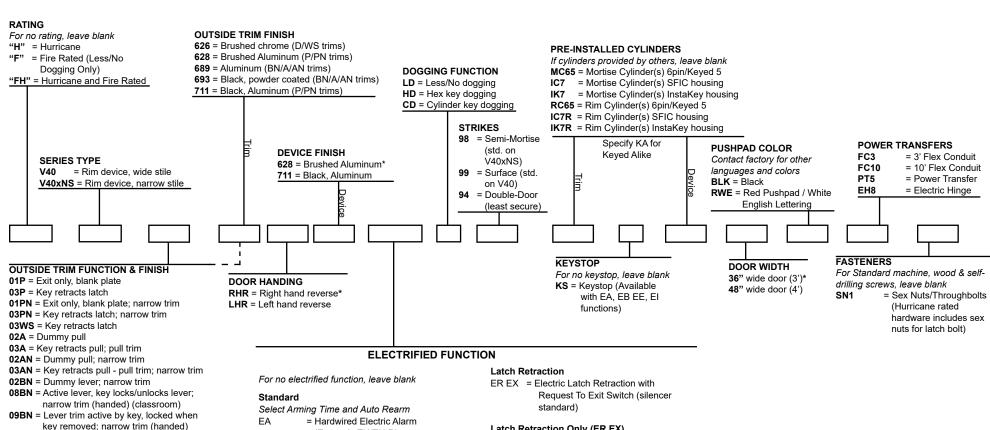

(Formerly EH/EH R)

EΒ = Electric Alarm with Battery ED = Electric Dogging

ΕX

= Request To Exit (Signal) Switch EXV = Request To Exit (Current) Switch

ΕI = Electric Integration (logic controller required)

ES = Electric Switching (dead latch & OKC switches)

## **Delayed Egress**

Select Arming Delay, Delayed Egress Time and Silent Arming

= Delayed Egress

All fire-rated devices Less Dogging/fail safe

Delayed Egress Only (EE) Comes standard with 90-800 power supply Single = (1) 90-800 w/o bat backup Pair = (1) 90-800 w/o bat backup

Latch Retraction Only (ER EX)

(Sold Separately) Single = 81-800 Pair = 82-800 2 Single = 83-800

Detex products can expose you to chemicals including Chromium (hexavalent compounds) and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.detex.com/prop65

Fire-rated trims must be Fail Safe (FSA)

specify FSA

(storeroom)

(handed) (passage)

(storeroom)

device) (passage)

**14BN** = Active lever, no key cylinder; narrow trim

02D2W = Dummy lever; wide trim (two posts for

head device) (classroom)

**09D2W** = Lever trim active by key, locked when

**14D2W** = Active lever, no key cylinder; wide trim

**EU2W** = Electric lock/unlock: wide trim (two posts

for use with narrow head device) -

24VDC & Fail Secure (FSE) Std. -

CBK = Cylinder Bracket Kit, 03 only, plate & pull handle by others required

Specify handing (not field reversible).

For 12VDC specify VDC. For Fail Safe

use with narrow head device) **08D2W** = Active lever, key locks/unlocks lever:

wide trim (two posts for use with narrow

key removed; wide trim (two posts for use with narrow head device)

(two posts for use with narrow head