


AO19 SERIES®

AO19 Complete Wireless Activation Package 59 Series 4 1/2" Square Push Plate Switches

The 104792 ClearPath Turnkey Radio Control Packages contain switches, transmitters, surface-mounting boxes, and receivers for common low energy automatic openings.

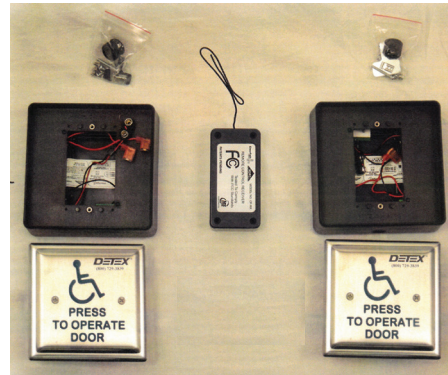

Benefits

- The 104755 Series push plate switches are designed to provide reliable activation of any automatic door
- Utilizes Proprietary High Definition Radio Control™ (HDRC™) For Unsurpassed Signal Transmission Clarity
- The CP/RX and CP/TX can also be used interchangeably with other manufacturer's products that operate on its frequencies
- Durable finishes.
- Each unit is built utilizing heavy gauge stainless steel, aircraft quality rivets and screws
- The most reliable microswitch in the industry
- The CP/RX and CP/TX accepts three different frequencies. HDRC, 300MHz, 390MHz
- CP/RX can be easily programmed to become a timer, dual receiver or a sequencing receiver
- Two piece mounting boxes are designed to make installation and battery replacement quick and easy for wireless applications
- The CP/TX transmitter comes prewired and installed with 9V battery in a surface mount box
- Utilizes Proprietary High Definition Radio control™ (HDRC™) For Unsurpassed Signal Transmission Clarity
- Three User Selectable Frequencies Available In Single Unit: HDRC™, 300 MHz, 390 MHz
- FCC License For All Three Frequencies
- SignalLock™ Guarantees Signal Transmission When Push Plate Switch Is Pressed
- Power Saving Circuitry Extends Battery Life
- Integrated Signal Radiating Antenna Boosts Signal Strength

Features

- The 104792 package features (2) 4" square face plates in stainless steel. (104755)
- Includes tamper-resistant screws
- 4" x 4" All Active Face Plate
- H 4 1/2" x 4 1/2" Formed Stainless Steel Back Plate
- Rubber "Bellows" Increases Weather Protection (included)
- Includes Surface Mount Box with Standard Transmitter. (104753)
- Includes Standard receiver. (104752)

Electrical Options

- The 104792 package features (2) 4" square face plates in stainless steel.(104755)
- Includes tamper-resistant screws.
- 4" x 4" All Active Face Plate.
- H 4 1/2" x 4 1/2" Formed Stainless Steel Back Plate.
- Rubber "Bellows" Increases Weather Protection (included).
- Includes Surface Mount Box with Standard Transmitter. (104753)
- Includes Standard receiver. (104752)

Accessories


- 104753 Mounting Box with Transmitter




Technical Information

- 4" x 4" All Active Face Plate
- 4 1/2" x 4 1/2" Formed Stainless Steel Back Plate
- UL Listed Momentary Switch, SPDT, 15 Amp @ 125V AC
- Output Contact: Form C, Rated At 3 Amps
- Power Requirements: 12V-24V AC or DC
- Relay Contact Rating: 3 amp @ 24V AC
- Temperature Range: -4°F to 40°F (-20°C to 60°C)
- 300 MHz: Compatible with Multicode™ products
- 390 MHz: Compatible with MS SEDCO and GENIE™ products
- Weight: <0.25 lbs.
- Physical Size 4"L x 2"W x 1"H
- Power Requirements: 9V Battery
- Relay Contact Rating: 3 amp @ 24V AC
- Temperature Range: -4°F to 40°F (-20°C to 60°C)
- 300 MHz: Compatible with Multicode™ products
- 390 MHz: Compatible with MS SEDCO and GENIE™ products
- Physical Size 2 1/4"W x 2 1/4"D x 2"H
- Weight: 1.46 lbs. (663g)

Riser Diagram

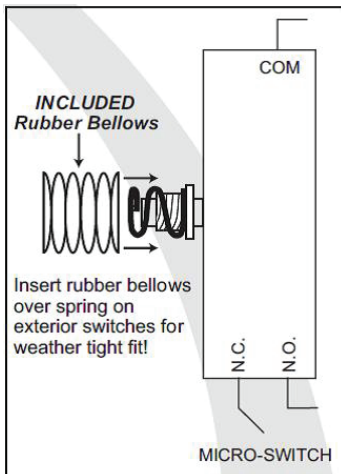

Dimensions

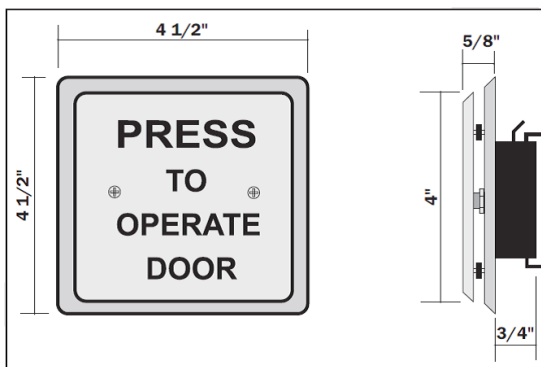

Listings and Approvals



American National Standards Institute (ANSI)



Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.10 & A156.19



UL Approved Switches

Warranty

1 Year Limited Manufacturer's Warranty

Where Trust is Built™
DETEX®
 Life Safety, Security and Security Assurance

Detex Corporation
 302 Detex Drive
 New Braunfels, Texas 78130-3045 USA
 PH. (830) 629-2900
 (800) 729-3839
 FAX (800) 653-3839
<http://www.detex.com>
 USA Sales:
marketing@detex.com
 International Sales:
export@detex.com

⚠ Cancer & Reproductive Harm - www.detex.com/prop65