



## Exit Alarm (EA)

The Exit Alarm (EA) device option is designed for areas that require a stand-alone alarm on an emergency exit door. The alarm will sound when someone attempts to exit a door by depressing the pushpad, alerting management that violation has occurred. The internal alarm with remote signal and remote bypass capabilities is ideal for doors where both security and life safety are a concern.



10 Series Rim Exit Device shown  
Shown with Factory Installed Mortise Cylinder - Sold Separately

Available with 10/40 Rim, 30 Mortise, 20/21/50/51 Surface Vertical Rod Devices and 60/61/62/63/70/71/80/81/82/83 Concealed Vertical Rod Devices

### Benefits

- Controls foot traffic, deters unauthorized exits, prevents loss and meets building code requirements
- Reduces employee and customer theft
- One cylinder provides arming, disarming and dogging
- Fast and easy installation saves time and money
- Durable electronics provide years of trouble-free service, saving on replacement costs

### Features

- Powered by standard 9-volt battery or 12V or 24V AC/DC power with 9-volt battery backup
- 100dB alarm
- State-of-the-art electronics offer reliable security and instantaneous alarm
- Arming delay - Factory default is 15 second delay after key reset. 1 second or 5 second delays also available. Call factory
- Manual/Auto Rearming - Factory default is field-selectable for manual key arming or 2 minute auto rearm. 10 minute and 20 minute auto rearm also available. Call Factory
- Mortise cylinder key switch arming
- Through-wire hinge or power transfer compatible
- Low Battery Alert (Audible/Visual)
- Visual and audible arming indicators


### Mechanical Options

- CD - Cylinder Dogging
  - LD - Less Dogging
  - SLR - Silencer
  - KS - Key Stop (Key removed only when armed)
  - Add to existing 10/20/21/30/40/50/51 device by adding EA slide-in filler (specify finish and door width)
  - FC3EC1 - Flexible 3' Conduit Kit, includes EC1 ramped end cap (specify finish)
  - FC3EC2 - Flexible 3' Conduit Kit, includes EC2 flush end cap (specify finish)
  - FC10EC1 - Flexible 10' Conduit Kit, includes EC1 ramped end cap (specify finish)
  - FC10EC2 - Flexible 10' Conduit Kit, includes EC2 flush end cap (specify finish)
  - PT5 - Concealed mortise mount power transfer
  - EH8 - Five-knuckle energy transfer hinge - 8 wires
- For full list of available mechanical options, see individual device how to order page

## Accessories

• MC65 - Factory Installed Mortise Cylinder

• Optional Cylinder Nut Wrench  
P/N: 103779



• PP-5152-3 - 12 VAC Transformer

• PP-5152-2 - 24 VAC Transformer

## Device Finishes

605 / US3 Polished Brass

606 / US4 Brushed Brass

611 / US9 Polished Bronze

612 / US10 Brushed Bronze

613 / US10B Oil Rubbed Bronze

628 / US28 Aluminum Satin


629 / US32 Polished Stainless Steel

630 / US32D Brushed Stainless Steel


693 / SPBLK Black, Painted

695 / SP 313 Dark Bronze, Painted

## Riser Diagram

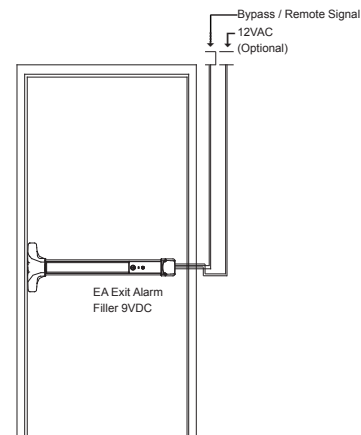

## Power Connections

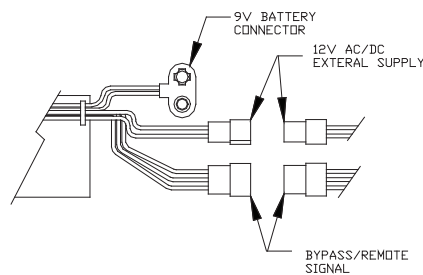

## Listings and Approvals

See individual device (i.e. 10 Series) catalog page for fire and panic listings and windstorm ratings/ approvals

## Detex Limited Warranty

10 Year Mechanical/3 Year Electrical Limited Manufacturer's Warranty

*Where Trust is Built™*

**DETEx®**

*Life Safety and Security Door Hardware*

Detex Corporation

302 Detex Drive

New Braunfels, Texas 78130-3045 USA

PH. (830) 629-2900

(800) 729-3839

FAX (800) 653-3839

<http://www.detex.com>

USA Sales:

[marketing@detex.com](mailto:marketing@detex.com)

International Sales:

[export@detex.com](mailto:export@detex.com)

⚠ Cancer & Reproductive Harm - [www.detex.com/prop65](http://www.detex.com/prop65)