



Weatherized Electric Request to Exit Switching (EX W) Weatherized High Current / Voltage Switching (EXV W)

The EX W meets the following standards: Mil 810F(G), 509.4 - Salt Fog, Mil 810F(G), 506.4 - Driving Rain Procedure 1, UL1034-34 Temperature Section 34 [Temperature Range -31° F (-35° C) to 151° F (+66° C)], and UL-1034-54 Dust Section 543.

The EXV W meets the following standards: Mil 810F(G), 509.4 - Salt Fog, Mil 810F(G), 506.4 - Driving Rain Procedure 1, UL1034-34 Temperature Section 34 [Temperature Range -31° F (-35° C) to 151° F (+66° C)], and UL-1034-54 Dust Section 54.



Available with 10/40 Series Rim, 30 Series Mortise, and 20/21/50/51 Series Surface Vertical Rod Devices

Benefits

- Integrates with other loss prevention equipment
- Fits almost any door in any décor
- Withstands over 1400 pounds of static pull force for greater security
- Fast and easy installation saves time and money


Features

- Withstands environmental elements when installed on gates or exterior doors
- Weatherized switch for signalling at low currents to a central control station
- Standard SPDT (Form C) switch with three wires, Yellow (N/O), Brown (Common) & Green (N/C), creating either a Normally Open or Closed contact
- To shunt power to an electromagnetic lock, specify EXVxW
- Stainless steel, 3/4" throw deadlocking latch bolt


Mechanical Options

- CD - Cylinder Dogging
 - HD - Hex Dogging (Std.)
 - LD - Less Dogging
 - LF - Less Flex Conduit
 - FC3EC1 - Flexible 3' Conduit Kit, includes EC1 ramped end cap (specify finish)
 - FC3EC2 - Flexible 3' Conduit Kit, includes EC2 flush end cap (specify finish)
 - FC10EC1 - Flexible 10' Conduit Kit, includes EC1 ramped end cap (specify finish)
 - FC10EC2 - Flexible 10' Conduit Kit, includes EC2 flush end cap (specify finish)
 - GTPLKIT - Adjustable Gate Plate
- For full list of available mechanical options, see individual device how to order page


Single Door

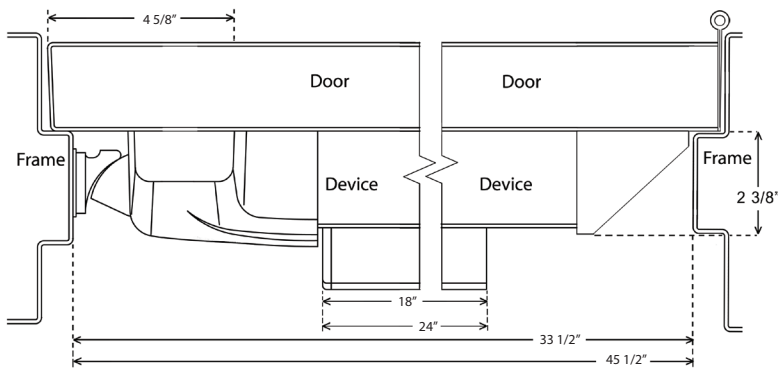

Double Door with 90KR Mullion

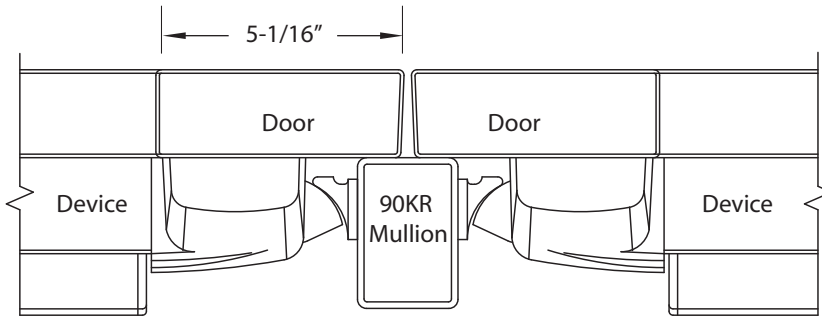

Dimensions

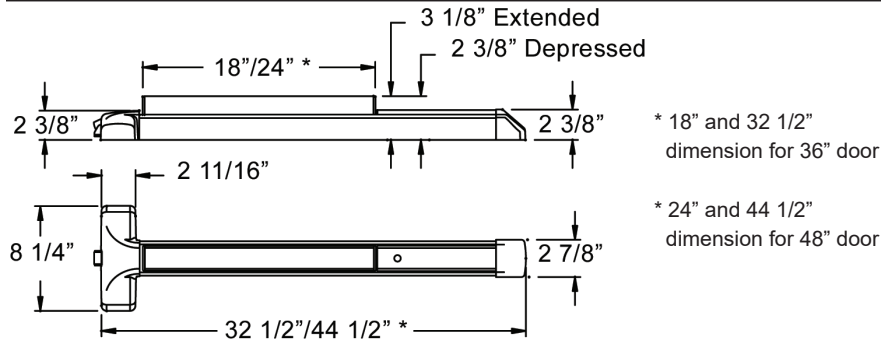

Listings and Approvals

See individual device (i.e. 10 Series) catalog page for fire and panic listings and windstorm ratings/ approvals

Detex Limited Warranty

10 Year Mechanical/3 year Electrical Limited Manufacturer's Warranty

Accessories

- GB1 - Glass Bead Kit
- SN1 - Sex Nut Kit (2 per package)
- SSK - Security Torx Screw Kit
- Trim Functions (see Outside Trims)
- Electrified Options (see Electrified Options)

Technical Information

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Door Thickness - Fits standard 1-3/4" - 2-1/4" doors (for other door thicknesses contact factory)
- Minimum Stile - 4-5/8" with standard 99 strike; 4-1/8" with optional 98 strike
- Fasteners - Machine and Self-Drilling Screws standard

Finishes

605 / US3	Polished Brass
606 / US4	Brushed Brass
611 / US9	Polished Bronze
612 / US10	Brushed Bronze
613 / US10B	Oil Rubbed Bronze
628 / US28	Aluminum Satin
629 / US32	Polished Stainless Steel
630 / US32D	Brushed Stainless Steel
693 / SPBLK	Black, Painted
695 / SP 313	Dark Bronze, Painted

Cancer & Reproductive Harm - www.detex.com/prop65

Where Trust is Built™
DETEX®
Life Safety and Security Door Hardware

Detex Corporation
 302 Detex Drive
 New Braunfels, Texas 78130-3045 USA
 PH. (830) 629-2900
 (800) 729-3839
 FAX (800) 653-3839
<http://www.detex.com>
 USA Sales:
marketing@detex.com
 International Sales:
export@detex.com