REMOTE ALARMS CS940/950F; CS940/950S; CS2940/2950F; CS2940/2950S

The CS900/2900 Series Remote Alarms are designed to sound an alarm when a signal is sent from a door switch, remote relay output, or another alarm. The piercing 100dB alarm will alert management of a security breach even in a noisy environment. When the cause of the alarm has been secured, the remote alarm is automatically silenced.





CS900/2900F Series Flush Mounted Remote Alarm




CS900/2900S Series Surface Mounted Remote Alarm

CS900 Series 9VDC Battery Powered CS2900 Series External Powered (Plug-in Transformer Included) with 9VDC Battery Backup

Benefits		
 No cylinder required - cylinder dummy included 	 100dB alarm sounds when triggered by main alarm, demanding attention 	 Silencing the main alarm automatically resets the remote alarm
Features		
 Installed in a double switch/outlet box (flush units) 	 Red LED lights up when alarm sounds 	Available in gray (CS940/CS2940) or black (CS950/CS2950)
• Battery Backup (2900 Series)		 Flush mount (specify suffix F) or Surface mount (specify suffix S)
Mechanical Options		
 SSK4 - Tamper Proof Kit - Adds tamper resistance 		
Technical Information		
9VDC Battery (CS900)	 Monitors an open contact 	 Remote alarm can be up to 1000 feet from primary alarm with 18
CS2900 includes 120VAC plug-in adapter	• Max current draw - 50mA	gauge twisted pair wire

Dimensions

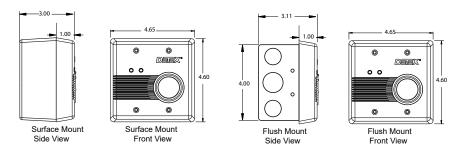



Detex Corporation 302 Detex Drive New Braunfels, Texas 78130-3045 USA PH. (830) 629-2900 (800) 729-3839 FAX (800) 653-3839 http://www.detex.com USA Sales: marketing@detex.com International Sales: export@detex.com

A Cancer & Reproductive Harm - www.detex.com/prop65