

AUXILIARY PRODUCTS

S2B & HS2B Strobe and Horn/Strobe

For added security in your facility, Detex offers a line of additional strobes and horn/strobe combinations. When the environment is noisy, these will draw your attention to possible breaches in your security.



S2B
Strobe Only



HS2B
Horn / Strobe

Benefits

- Plug-in design speeds installation
- Ample room in backbox prevents nicked/crushed wires
- Mounting plate shorting spring tests wiring before installation

Features

- Knock-outs eliminate need for drilling


Electrical Options

- S2B - Strobe only, 2 wire, 12/24VDC
- HS2B - Horn/Strobe, 2 wire, 12/24VDC

Technical Information

- Standard operating temperature - 32 to 120F (0 to 49C)
- Flush Mounting - Std single gang backbox
- Input terminal wire gauge - 12 to 18 AWG
- Horn - Volume High 91dB at 24V and Volume Low 83dB at 24V
- Flush or surface - 4" x 1-1/2" deep backbox
- Strobe flash rate - 1 per second
- Voltage range - 16 to 33VDC
- 250mA max current draw

Dimensions

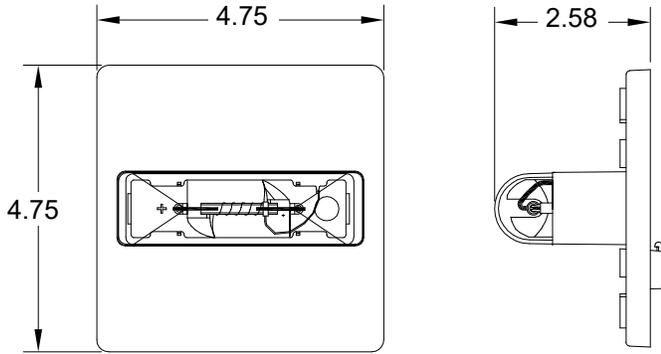


Listings and Approvals



UL 1971
 UL 464
 UL 1638
 ULC-S526-02

Riser Diagram

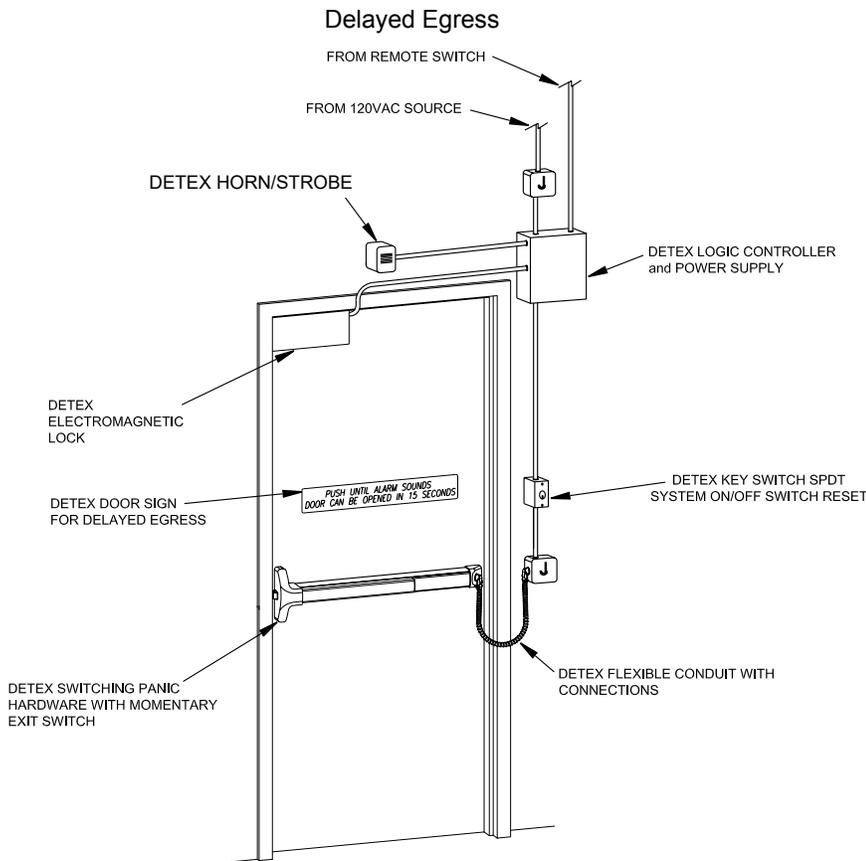

Detex Corporation
 302 Detex Drive
 New Braunfels, Texas 78130-3045 USA
 PH. (830) 629-2900
 (800) 729-3839
 FAX (800) 653-3839
 http://www.detex.com
 USA Sales:
 marketing@detex.com
 International Sales:
 export@detex.com

Cancer & Reproductive Harm - www.detex.com/prop65