

# AUXILIARY PRODUCTS

## S2B & HS2B Strobe and Horn/Strobe

---

For added security in your facility, Detex offers a line of additional strobes and horn/strobe combinations. When the environment is noisy, these will draw your attention to possible breaches in your security.



**S2B**  
Strobe Only



**HS2B**  
Horn / Strobe

---

### Benefits

- Plug-in design speeds installation
- Ample room in backbox prevents nicked/crushed wires
- Mounting plate shorting spring tests wiring before installation

---

### Features

- Knock-outs eliminate need for drilling

---

### Electrical Options


- S2B - Strobe only, 2 wire, 12/24VDC
- HS2B - Horn/Strobe, 2 wire, 12/24VDC

---

### Technical Information

- Standard operating temperature - 32 to 120F (0 to 49C)
- Flush Mounting - Std single gang backbox
- Input terminal wire gauge - 12 to 18 AWG
- Horn - Volume High 91dB at 24V and Volume Low 83dB at 24V
- Flush or surface - 4" x 1-1/2" deep backbox
- Strobe flash rate - 1 per second
- Voltage range - 16 to 33VDC
- 250mA max current draw

## Dimensions

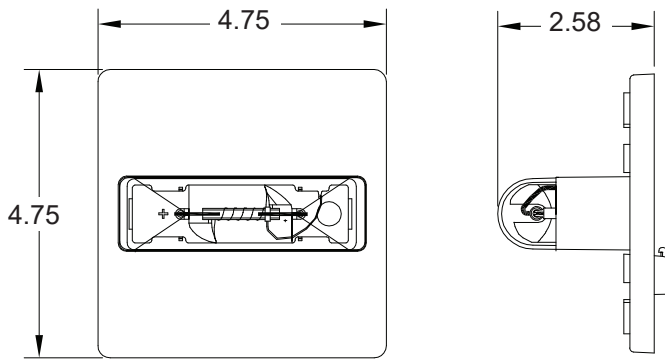


## Listings and Approvals



UL 1971  
 UL 464  
 UL 1638  
 ULC-S526-02

## Riser Diagram

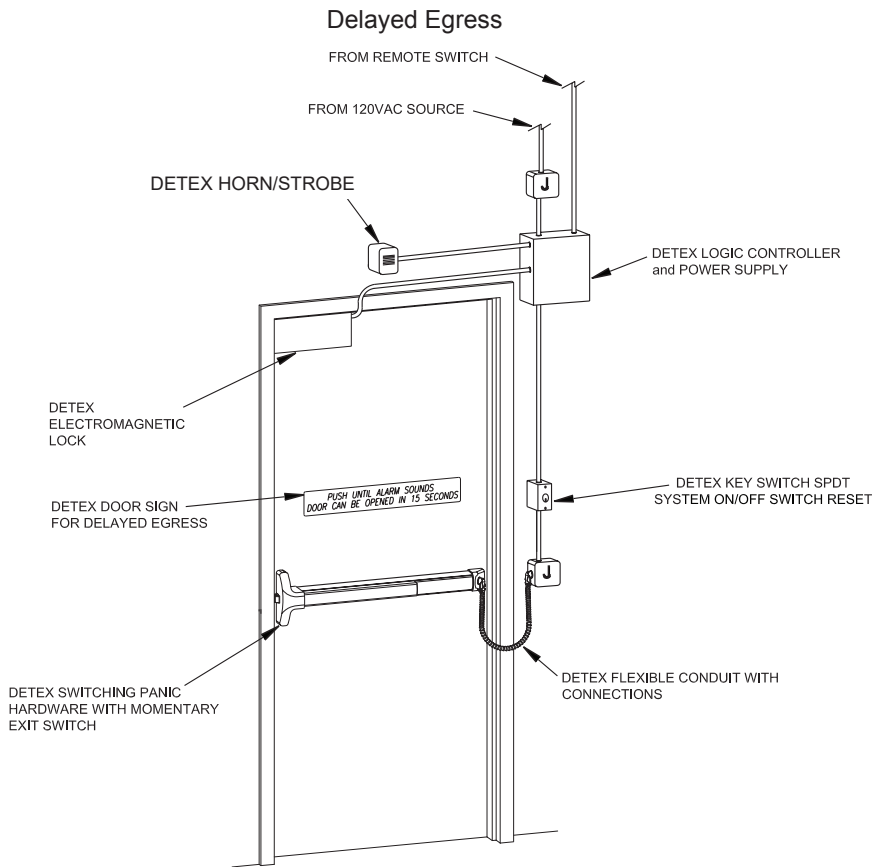

Where Trust is Built™  
**DETEX**®  
 Life Safety, Security and Security Assurance

Detex Corporation  
 302 Detex Drive  
 New Braunfels, Texas 78130-3045 USA  
 PH. (830) 629-2900  
 (800) 729-3839  
 FAX (800) 653-3839  
<http://www.detex.com>  
 USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
 International Sales:  
[export@detex.com](mailto:export@detex.com)

⚠ Cancer & Reproductive Harm - [www.detex.com/prop65](http://www.detex.com/prop65)