
VALUE SERIES V40xW SERIES (RIM, WEATHERIZED)

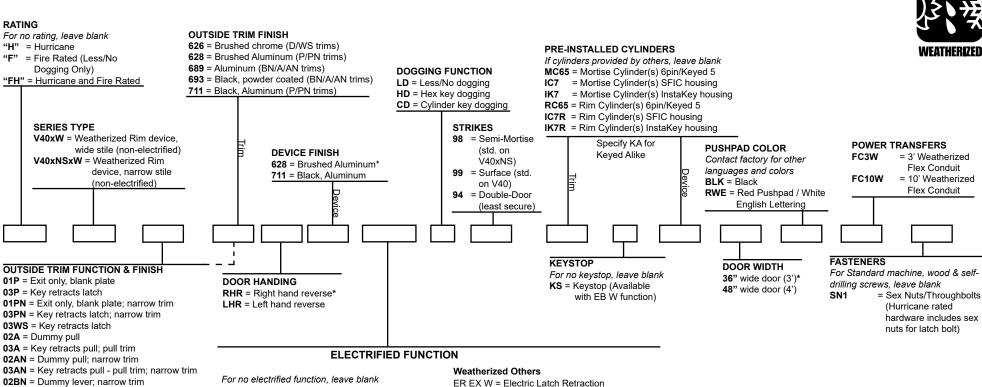

Weatherized Alarms

Select Arming Time and Auto Rearm

= Electric Battery Operated Exit Alarm Weatherized

Latch Retraction

ER EX W = Electric Latch Retraction

Weatherized with Request To

Single = 81-800

Pair = 82-800 2 Single = 83-800

Weatherized with Request To

Exit Switch (silencer standard)

EX W = Request To Exit (Signal)

Switch Weatherized

EXV W = Request To Exit (Current)

Switch Weatherized

WDE = Weatherized Delayed

Egress (see EasyKits)

Detex products can expose you to chemicals including Chromium (hexavalent compounds) and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.detex.com/prop65

Exit Switch (silencer standard)

Latch Retraction Only (ER EX W)

(Sold Separately)

(storeroom)

wide trim (two posts for use with narrow

key removed; wide trim (two posts for

(storeroom)

(handed) (passage)

14D2W = Active lever, no key cylinder; wide trim (two posts for use with narrow head device) (passage)

08BN = Active lever, key locks/unlocks lever;

09BN = Lever trim active by key, locked when

narrow trim (handed) (classroom)

key removed; narrow trim (handed)

14BN = Active lever, no key cylinder; narrow trim

02D2W = Dummy lever; wide trim (two posts for

08D2W = Active lever, key locks/unlocks lever:

head device) (classroom)

09D2W = Lever trim active by key, locked when

use with narrow head device)

use with narrow head device)

EU2W = Electric lock/unlock: wide trim (two posts for use with narrow head device) -24VDC & Fail Secure (FSE) Std. -Specify handing (not field reversible). For 12VDC specify VDC. For Fail Safe specify FSA

CBK = Cylinder Bracket Kit, 03 only, plate & pull handle by others required