


# ES614

## Supervision

**12-VDC  
150mA  
Power Supply**  
*Sold Separately*

**Global Alarm Relay**  
*N/C dry contact.  
500ma @30VDC*

**Tamper Relay**  
*N/C dry contact.  
500ma @30VDC*

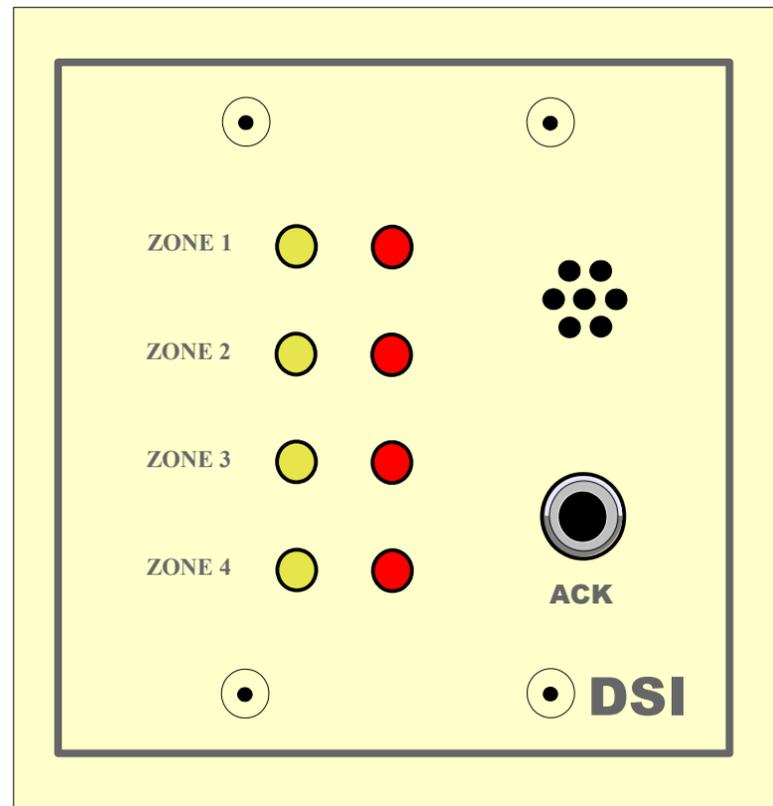

**Global Alarm Relay**  
*N/O dry contact.  
500ma @30VDC*

### Note:

#### Wire Gauge: Signal

*22 AWG = Signal wires up to 85 feet  
18 AWG = Signal wires up to 180 feet  
16 AWG = Signal wires up to 300 feet*

#### Wire Gauge: Power

*22 AWG = Power wires up to 85 feet  
18 AWG = Power wires up to 180 feet*

### Specifications:

**Power:** *12VDC at (150ma)*  
**Input:** *N/C door contact*  
**Output:** *N/O global alarm relay 500ma at 30 VDC*  
**Output:** *N/C global alarm relay 500ma at 30 VDC*  
**Output:** *N/C tamper alarm relay 500ma at 30 VDC*  
**Horn Volume:** *70 db*  
**Back box:** *2 Gange 2.5" deep*

**ES614 (Front View)**  
*Alarms when door  
switch opens.  
An audible alarm and an  
amber LED will indicate a  
tamper condition*

### Note:

For eight zones use an  
**ES624**  
For twelve zones use an  
**ES634**

**DSI™**  
**DESIGNED SECURITY, INC.**

*1-800-272-3555*

