

ES615


Supervision and Shunt

**12-VDC
150mA
Power Supply**
Sold Separately

Global Alarm Relay
*N/C dry contact.
500ma @30VDC*

Tamper Relay
*N/C dry contact.
500ma @30VDC*

Note:
For eight zones use an
ES625
For twelve zones use an
ES635

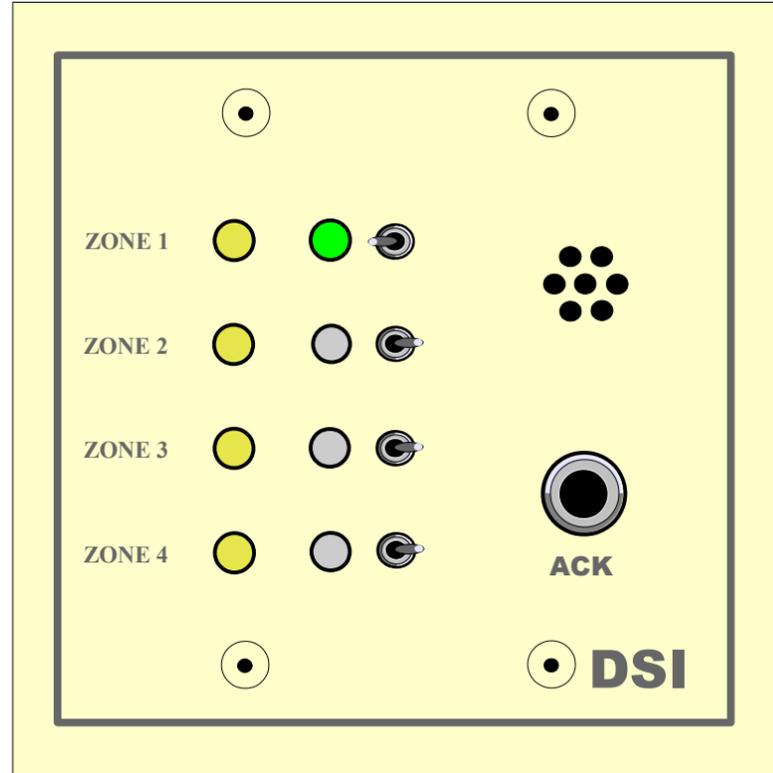

Shunt Switch
*Toggle to the left to
shunt the zone.
(Example zone one)*

Global Alarm Relay
*N/O dry contact.
500ma @30VDC*

Note:

Wire Gauge: Signal

*22 AWG = Signal wires up to 85 feet
18 AWG = Signal wires up to 180 feet
16 AWG = Signal wires up to 300 feet*

Wire Gauge: Power

*22 AWG = Power wires up to 85 feet
18 AWG = Power wires up to 180 feet*

Specifications:

Power: *12VDC at (150ma)*
Input: *N/C door contact*
Output: *N/O global alarm relay 500ma at 30 VDC*
Output: *N/C global alarm relay 500ma at 30 VDC*
Output: *N/C tamper alarm relay 500ma at 30 VDC*
Horn Volume: *70 db*
Back box: *2 Gange 2.5" deep*

ES615 (Front View)

*Alarms when door
switch opens.
An audible alarm and an
amber LED will indicate a
tamper condition*

