


ES622


ZONE ANNUNCIATOR WITH N/O RELAYS

**12-VDC
300mA
Power Supply**
Sold Separately

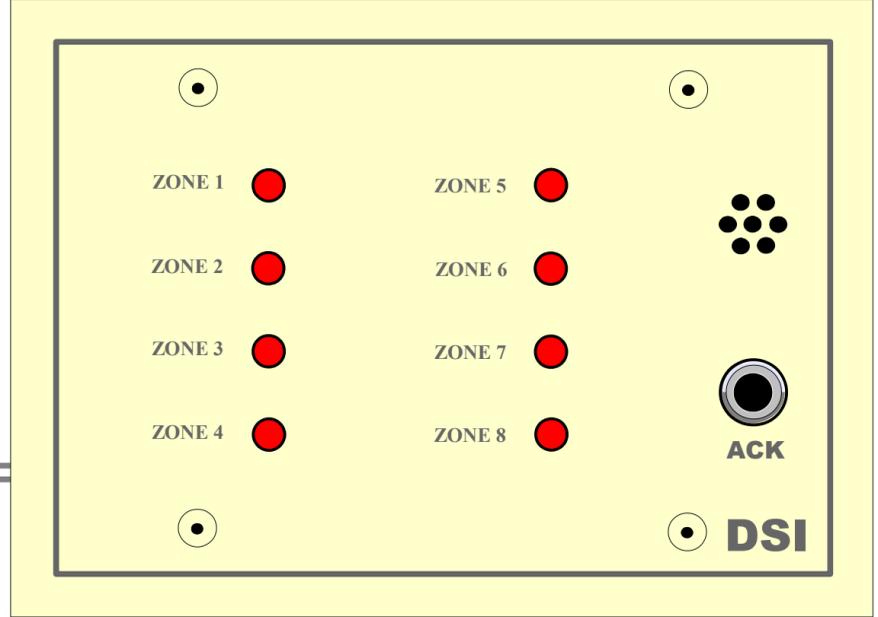

Global Alarm Relay
*N/O dry contact.
500mA @30VDC*

ES622 (Front View)
Alarms when door switch opens.

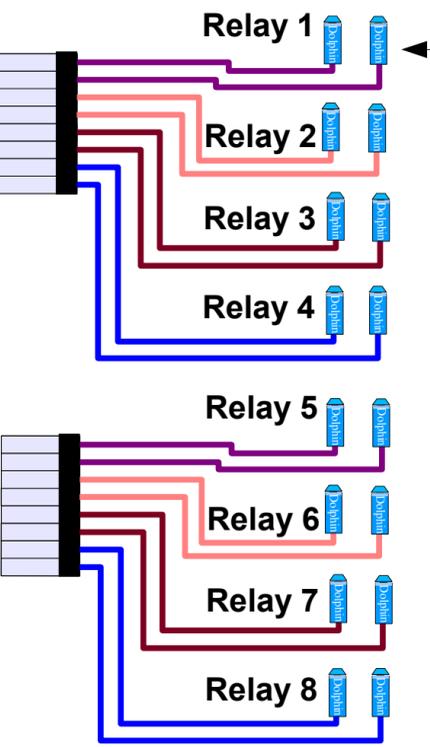

"B" Connectors
Provided in the ship kit

Zone Relays
*N/O dry contact.
500ma @30VDC*

Zone relay will close when in alarm.

Zone relay follows the Alarm

Note:
Wire Gauge: Signal
*22 AWG = Signal wires up to 85 feet
18 AWG = Signal wires up to 180 feet
16 AWG = Signal wires up to 300 feet*
Wire Gauge: Power
*22 AWG = Power wires up to 85 feet
18 AWG = Power wires up to 180 feet*

Specifications:
Power: *12VDC at (300ma)*
Input: *N/C door contact*
Output: *N/O global alarm relay 500mA @ 30 VDC*
Zone Relay: *N/O dry contact 500mA @ 30VDC*
Horn Volume: *70 db*
Back box: *3 Gang 2.5" deep*

Note:
For four zones use an **ES612**
For twelve zones use an **ES632**

DSI™
DESIGNED SECURITY, INC.
1-800-272-3555

