

ES625

8 ZONE ANNUNCIATOR WITH SUPERVISION AND SHUNT




DESIGNED SECURITY, INC.

1-800-272-3555

12-VDC
300mA
Power Supply
Sold Separately

Global Alarm Relay
*N/C dry contact.
500ma @30VDC*

Tamper Relay
*N/C dry contact.
500ma @30VDC*

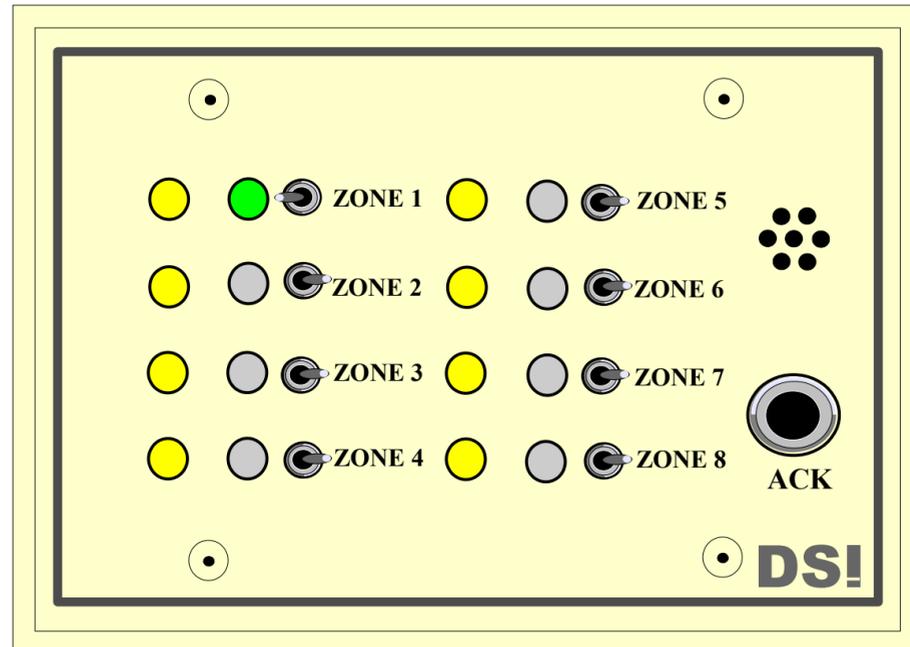

Shunt Switch
*Toggle to the left to
shunt the zone.
(Example: zone one)*

Global Alarm Relay
*N/O dry contact.
500ma @30VDC*

Note:
For four zones use an
ES615
For twelve zones use an
ES635

Specifications:

- Power: **12VDC at (300ma)**
- Input: **N/C door contact**
- Output: **N/O global alarm relay 500ma at 30 VDC**
- Output: **N/C global alarm relay 500ma at 30 VDC**
- Output: **N/C tamper alarm relay 500ma at 30 VDC**
- Horn Volume: **70 db**
- Back box: **3 Gange 2.5" deep**

Note:

Wire Gauge: Signal
*22 AWG = Signal wires up to 85 feet
18 AWG = Signal wires up to 180 feet
16 AWG = Signal wires up to 300 feet*

Wire Gauge: Power
*22 AWG = Power wires up to 85 feet
18 AWG = Power wires up to 180 feet*

ES625 (Front View)
*Alarms when door switch opens.
An audible alarm and an amber LED
will indicate a tamper condition.*

