

ES632



12 ZONE ANNUNCIATOR AND N/O RELAYS



DESIGNED SECURITY, INC.

1-800-272-3555

12-VDC
500mA
Power Supply
Sold Separately

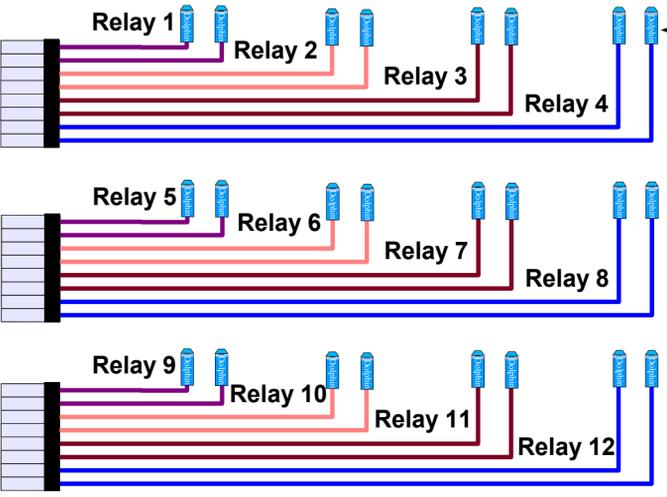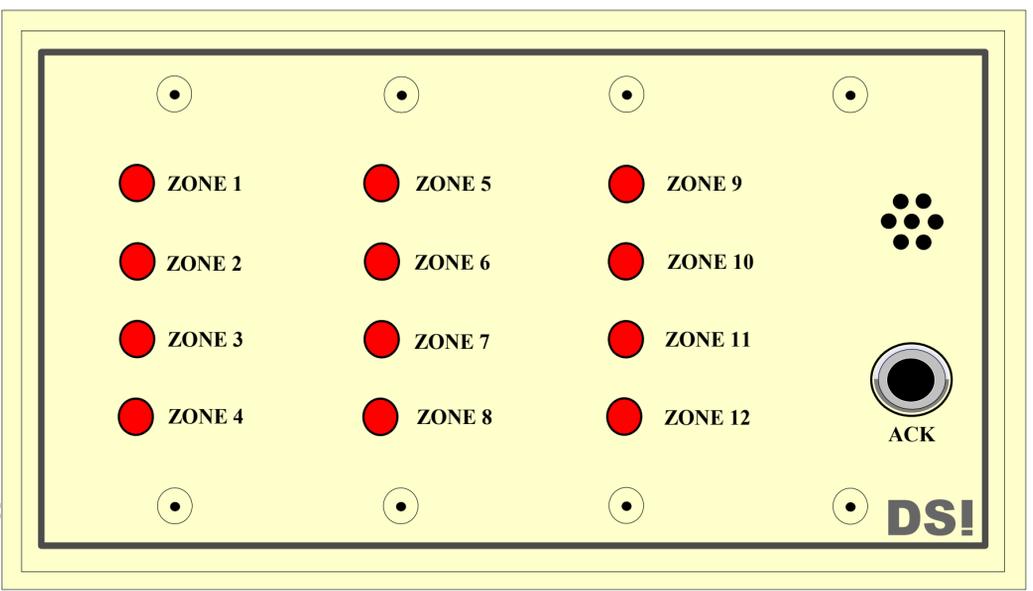

"B" Connectors
Provided in the ship kit

Global Alarm Relay
*N/O dry contact.
500mA @30VDC*

Zone Relays
*N/O dry contact.
500ma @30VDC*

Zone relay will close when in alarm.

Zone relay follows the Alarm

Note:
For four zones use an **ES612**
For Eight zones use an **ES622**

Note:
Wire Gauge: Signal
22 AWG = Signal wires up to 85 feet
18 AWG = Signal wires up to 180 feet
16 AWG = Signal wires up to 300 feet
Wire Gauge: Power
22 AWG = Power wires up to 85 feet
18 AWG = Power wires up to 180 feet

4 Gang back box
2.5" Deep

ES632
*Alarms when door switch opens.
Relays follow the alarm.*

Specifications:
Power: 12VDC at (500ma)
Input: N/C door contact
Output: N/O global alarm relay 500mA @ 30 VDC
Zone Relay: N/O dry contact 500mA @ 30VDC
Horn Volume: 70 db
Back box: 4 Gang 2.5" deep

