



5 Foot Rim Exit Device

The 5 foot rim exit device is heavy-duty panic hardware, ideal for extra-wide single doors or pairs with mullions. The standard version is designed for single and pairs of doors, while the weatherized model provides reliable performance on gates.



Benefits

- Tough and durable design for years of trouble-free service in high-use, high-abuse environments
- Patented mounting plate and strike locator system replaces paper templates
- Fast and easy installation saves time and money
- Minimal door prep saves time and money
- Outside trims are easily changed or re-keyed without removing device from door
- Heavy duty angled end cap deflects damage away from device

Features

- All exposed surfaces are finished over stainless steel with PVD, an environmentally-friendly finishing process
- Non-handed
- Field sizeable
- 30 inch pushpad
- Stainless steel deadlocking, Pullman-type latch bolt
- 1/8 turn hex or cylinder dogging

Mechanical Options

- CD - Cylinder Dogging
 - HD - Hex Dogging (Std.)
 - LD - Less Dogging
 - 99R - Roller Strike
 - SN1 - Sex Nuts / Throughbolts
 - EC1 - Heavy duty angled end cap (Std.)
 - EC2 - Flush end cap
 - FC3 - 3' Flex Conduit
 - FC10 - 10' Flex Conduit
 - FC3W - 3' Weatherized Flex Conduit
 - FC10W - 10' Weatherized Flex Conduit
- For full list of available mechanical options, see 5 Foot How To Order page

Electrical Options

- Weatherized Battery Powered Exit Alarm (EB W)
 - Electric Latch Retraction with Request to Exit Switch (ER EX)
 - Weatherized Electric Latch Retraction with Request to Exit Switch (ER EX W)
 - Hardwired Exit Alarm (EA)
 - Electric Integration (EI)
 - Electric Switching (ES)
 - Latch Bolt Signaling Switch (LX)
 - Latch Bolt Signaling Switch - High Current (LXV)
 - Request to Exit (EX)
 - Weatherized Request to Exit (EX W)
- Refer to Electrified Options section for more information




Technical Information

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Door Thickness - Fits standard 1-3/4" - 2-1/4" doors (for other door thicknesses contact factory)
- Minimum Stile - 4-5/8" with standard 99 strike; 4-1/8" with optional 98 strike

- Recommended Gate Plate Size - 1/8" thick plate, galvanized, or painted steel or 1/4" thick aluminum plate, minimum height - 10"
- Fasteners - Machine and Self-Drilling Screws standard

Dimensions

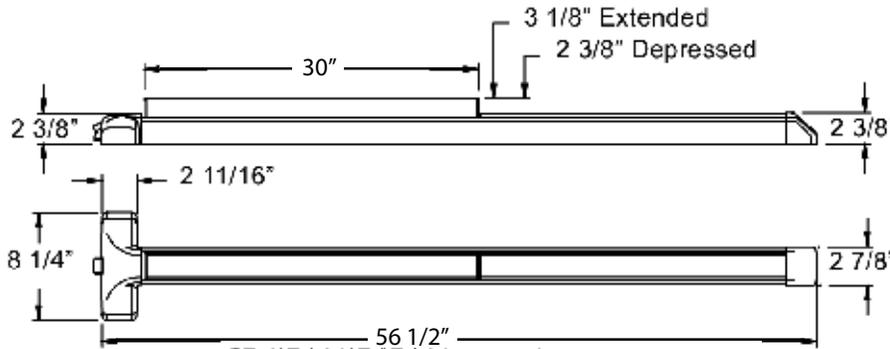

Accessories

- GB1 - Glass Bead Kit
- SN1 - Sex Nut Kit (2 per package)
- SSK - Security Torx Screw Kit
- Trim Functions (see Outside Trims)

Finishes

628 / US28	Aluminum Satin
693 / SPBLK	Black, Painted
695 / SP 313	Dark Bronze, Painted

Listings and Approvals



UL Listed Panic Hardware



UBC 97, Standard 7-2 and UL10B/
UL10C for positive pressure



Meets ADA requirements



ANSI/BHMA certified A156.3

Detex Limited Warranty

10 Year Mechanical/3 year Electrical
Limited Manufacturer's Warranty

For detailed windstorm and fire listings, visit www.detex.com/PROVEN

DETEX[®]
A Century of Security
1923-2023

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA
PH. (830) 629-2900
(800) 729-3839
FAX (800) 653-3839
<http://www.detex.com>
USA Sales:
marketing@detex.com
International Sales:
export@detex.com

Cancer & Reproductive Harm - www.detex.com/prop65