



Detex Corporation, 302 Detex Drive, New Braunfels, Texas 78130-3045 830-629-2900 / 800-729-3839 / Fax 800-653-3839 / Text photos only: 830-481-6433 / INTERNET: www.detex.com

INSTRUCTIONS FOR ELECTRIFIED MULLION (ADDENDUM FOR 90KRE)

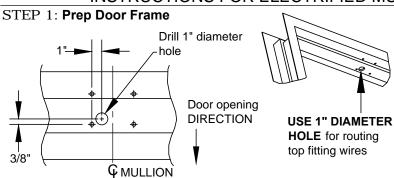




WARNING

Ensure POWER IS REMOVED from wires before making connection.

Make connections as needed and tuck all wires up into header


STEP 3: Prep Mullion (Remove wire harness)

Prep Mullion for Electric Strike or other Electrified Hardware (Prep per manufacturer's installation instructions)

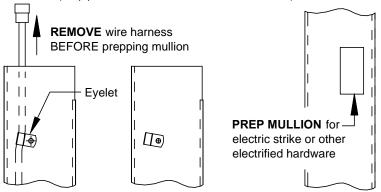

STEP 4: Re-Install Wire Harness & Install Electric Strike or other Electrified Hardware (per Mfg's instructions)

RE-INSTALL wire harness in mullion after prepping for strike




WARNING! Ensure POWER IS REMOVED from wires before making connection.

making connection.
Multiconductor cable
(5 wires, 18 Awg)
Black
Red
White
Green
Orange

LOOP, BUT DO NOT CUT


wire harness length.
NOTE: Mullion CONNECTION
at top fitting relies on full wire
harness length.


STEP 6: Install Mullion into Top Fitting





 $WARNING! \ \ \mbox{Ensure POWER IS REMOVED} \\ \ \mbox{from wires before making connection.} \\$





NOTE: Connectors are keyed and will only assemble one way



Should you have a Question/Problem with your Detex device please call Detex Technical Support from the job site at 1-800-729-3839 and choose option 2 on our menu. Please do not return the product to the distributor.

For WARRANTY information, scan code or go to www.detex.com/warranty



For device installation videos, scan code or go to www.detex.com/videos

